

JetBox 5432-w

Embedded Serial VPN Linux Computer



CE FC RoHS



- Intel IXP435 400MHz Networking Processor to enhance routing and VPN performance
- Complete Layer3 routing: OSPF, RIP, DVMRP, IPv6
- Full managed features with QoS and VLAN
- 4-port RS232/422/485 (DB37 connector), supporting TCP server/client and paired TCP modes
- Embedded Linux ready for easy maintenance
- DC 12~48V power inputs
- -40~80°C wide operating temp, fanless



Industrial Intelligent NMS

Rackmount PoE Plus Switch

Industrial PoE Plus Switch

Industrial 12-24V PoE Switch

Industrial PoE Switch

Rackmount L3/L2 Switch

Gigabit Managed Switch

Managed Ethernet Switch

Entry-level Switch

Wireless Outdoor AP

Embedded PoE/Router Computer (LINUX)

Industrial Communication Computer (WIN/LINUX)

Ethernet/PoE/Serial Board

Ethernet I/O Server

Media Converter

Serial Device Server

SFP Module

Din Rail Power Supply

Overview

The compact JetBox 5432 series is an industrial embedded layer-3 router computer with Linux computing capabilities and serial ports for connecting and remotely managing access and security control devices, such as card readers, cameras, speakers etc. in embedded front-end controller applications. In addition, with Ethernet, serial console and USB interfaces, the router computer can operate as a networking gateway to connect different network groups in flexible ways and manage peripherals at the front-end site through Linux programs.

Combined with IP31 rugged fan-less design, including vibration/shock resistance and -40~80°C wide operating temperature range, the JetBox 5432 series ensure the reliability and high performance of large network infrastructures in severe industrial vertical markets, such as transportation systems, public utilities, substations or other hazardous environments.

Embedded Linux Ready

Korenix is devoted to the Linux computing and benefits customers by providing the JetBox series with embedded Linux ready system and easy-to-use

interface. Compared to general purpose Linux system, embedded Linux is performance-optimized for front-end industrial control.

Serial Device Server


In today's network infrastructures there is still a large number of device communications going through serial ports. JetBox 5432 series is a perfect solution to manage serial devices via Ethernet in flexible ways, such as TCP server, TCP client, and paired TCP modes, while creating a transparent gateway for the serial communication to Ethernet.

VPN (Virtual Private Network)

Computer networks are no longer closed systems and may consist of intranets, extranets, and Internet sites. The key remote access requirement of an enterprise organization can be provided using VPN to mitigate the risks of malicious intrusion and establish a mechanism of users' identity.

DMVPN (Dynamic Multipoint Virtual Private Network) is an enhancement of VPN and an effective solution for dynamic secure overlay networks.

Dimensions (Unit = mm)

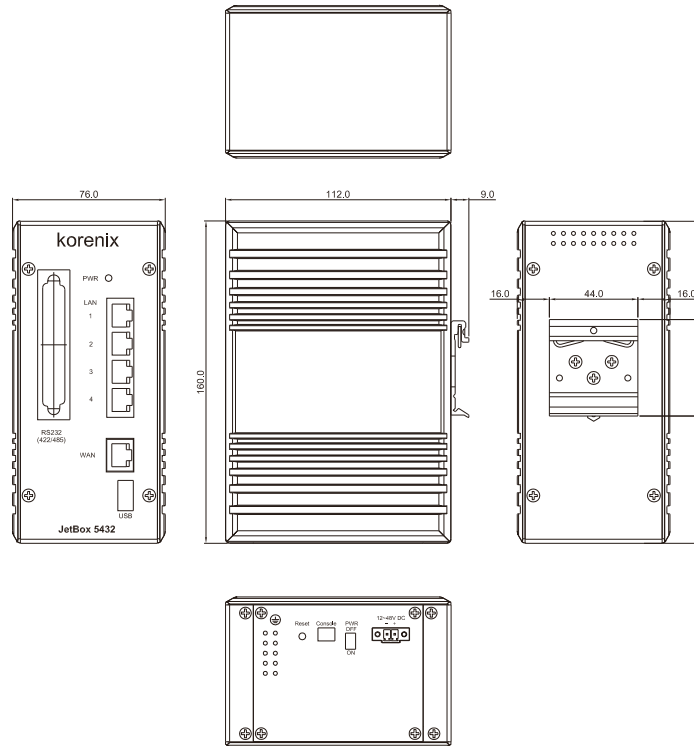

Hardware Specifications

System

Processor:

Intel Xscale IXP435 400MHz* RISC-based
Fanless

System memory: 128MB DDR2 RAM

System flash: 32MB

Ethernet: 10/100 Base-Tx RJ-45 connector x5

Serial port: RS232/422/485 x4 (DB37 connector) with long distance termination switches (internal), default RS232

USB: USB 2.0 x1 (Host)

Supporting devices: USB flash, wireless dongle

Console port: 3-pin header (RS232 interface)

LED per unit:

Power on/ off (Green on/ off) x1

LED on Ethernet port:

Link/ Activity (Green on/ blinking)

Fdx/Col status (Yellow on/ blinking)

Power on/off switch x1

Reset button x 1

HW Watchdog timer:

Generates a time-out system reset, 1sec

Power Supply: DC 12~48V

Power Consumption: 25W

OS support: Embedded Linux 2.6.20

Mechanical

Construction:

Rugged Aluminum Alloy Chassis, IP31 protection

Color: Silver

Mounting: DIN rail

Dimension: 160(H) x 112(W) x 76(D) mm

Net weight: 1.07kg

Environment

Operating Temp: -40 ~ 176°F (-40 ~ 80°C)*, 5 to 95% RH

Storage Temp: -40 ~ 176°F (-40 ~ 80°C), 5 to 95% RH

Regulation: FCC class A, CE

EN55022 class A, EN55024, EN61000-3-2, 3

EN61000-4-2, 3, 4, 5, 6, 8, 11

Shock: IEC60068-2-27 (50g peak acceleration)

Vibration:

IEC60068-2-6 (5g/10~150Hz/operating)

MTBF: Greater than 200,000 hours @25°C

Warranty: 5 years

*Specifications may change without prior notice

Feature Specifications

Serial Interface

Serial service modes: TCP server, TCP client, Paired TCP

WAN Interface

Ethernet: 10/100 Base-Tx RJ-45 connector x1, auto MDI/MDI-X

LAN Interface

Ethernet: 10/100 Base-Tx RJ-45 connector x4, auto MDI/MDI-X

Routing per VLAN: Support port-based VLAN and IEEE802.1Q VLAN

Quality of Service: Four priority queues per port, 802.1p COS and IP Layer TOS/DiffServ

Ethernet Performance

Transfer Rate: 14,880 pps for Ethernet port and 148,800 pps for fast Ethernet port

Transfer Packet Size: 64 bytes to 1522 bytes (with VLAN tag)

MAC address: 1K MAC address table

Memory Buffer: 512 Kbits

IP Routing Service

Static routing

Dynamic routing: RIP, RIP-II, OSPF, ISIS*, BGP*, DVMRP
PPP

PPPoE

IP Firewall/ Perimeter Security

IP address and port filtering

NAT/ DMZ

VPN: L2TP, PPTP, SLIP, VLAN, IPsec, OpenVPN, GRE*,

NHRP*, DMVPN*

Management & Security

Security

HTTPS, SSH, SFTP

Linux shell access via TELNET connection or console port

SNMP v1, v2c, v3: MIB and traps

MIB-II, Bridge MIB, Ethernet-like MIB, VLAN MIB

Proprietary SNMP MIB sample code

NTP for time management

Technology

Standard:

IEEE802.3 10Base-T Ethernet

IEEE802.3u 100Base-Tx Fast Ethernet

IEEE802.3x Flow Control and Back-pressure

IEEE802.1p Class of service

IEEE802.1Q VLAN

Processing: Store and Forward architecture

Packet filter: Broadcast packet filtering

*Specifications may change without prior notice

Industrial
Intelligent
NMS

Rackmount
PoE Plus
Switch

Industrial
PoE Plus
Switch

Industrial
12-24V
PoE Switch

Industrial
PoE Switch

Rackmount
L3/L2 Switch

Gigabit
Managed
Switch

Managed
Ethernet
Switch

Entry-level
Switch

Wireless
Outdoor AP

**Embedded
PoE/Router
Computer
(LINUX)**

Industrial
Communication
Computer
(WINLINUX)

Ethernet/PoE/
Serial Board

Ethernet
I/O Server

Media
Converter

Serial Device
Server

SFP Module

Din Rail
Power Supply

Linux Specifications

Embedded Linux

Bootloader: JetBox bootloader

Linux Kernel: 2.6.20

Shell: GNU ash

File system: jffs2, NFS, Ext2, Ext3, VFAT, FAT

Device drivers: USB, Watchdog timer, UART, Ethernet, DIO, PoE, SD/mSD card, CF card, HW IPsec VPN, HW Open VPN, JetCard1608/ 2105/ 2154G, VGA*, Mobile dongle*, GPS dongle*

Protocols: ARP, PPP, CHAP, IPv4, IPv6, PAP, ICMP, TCP, UDP, NFS, SNMP v1/v2c/v3, NTP, SSH1.0/2.0, SSL, OpenVPN, Ipsec, PPP, PPPoE, PPTP, FTP, HTTP, SMTP, DNS, L2TP, DVMRP, OSPF, RIP v1.0/2.0, BGP*, ISIS*, VRRP*, 802.11*, HSDPA*, GPRS* telnet, dhcp, VLAN

SW package: Busybox (telnetd, inetd, udhcp, syslogd), e2fsprogs, firmware, i2c-tools, microcom, mtd, netcat, pciutils, ser2net, setserial, sstutil, usbmount, usbutils, version, bridge-utils, ethtool, iptables, net-snmp, ntp, openssh, openssl, openvpn, openswan, pppd, rp-pppoe, pptp-linux, proftpd, samba, goahead, mutt, bind, l2tp, mrouted, quagga, vrrpd, wireless-tools, wvdial

Korenix Linux auto-run function

Customized configuration

Process monitoring

SDK

Linux tool chain: Gcc(C/C++ PC cross compiler), uClibc

Linux sample code

Note: Software supports differ from HW functions of each model



Ordering Information

JetBox 5432-w Embedded Serial VPN Linux Computer

Includes:

- JetBox 5432-w
- Console cable x1
- Attached 2-pin power terminal block
- Quick installation guide
- Documentation and software CD-ROM

Optional Accessories

- Serial cable
 - CM37M9x4-60 4-port male DB37 to male DB9 connection cable, 60cm
 - CM37M25x4-60 4-port male DB37 to male DB25 connection cable, 60cm