


Korenix Industrial Product Selection Guide - Multiport Serial Card

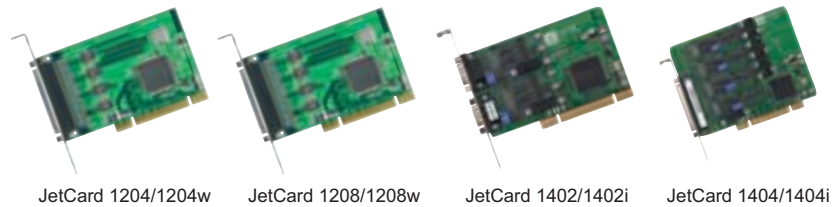

JetCard 1204/1204w JetCard 1208/1208w JetCard 1402/1402i JetCard 1404/1404i

Universal PCI Card

Number of RS-232 Ports	4	4		
Number of RS-422/485 Ports			2	4
32-bit Universal PCI Bus Interface	●	●	●	●
IRQ Assigned by PCI Plug and Play	●	●	●	●
Data Bits: 5, 6, 7, 8	●	●	●	●
Stop Bits: 1, 1.5, 2	●	●	●	●
Parity Bits: None, Even, Odd, Space, Mark	●	●	●	●
Communication Controller: 16C950 compatible	●	●	●	●
FIFO Size: 128 Bytes	●	●	●	●
Speed up to 921.6 Kbps	●	●	●	●
RS-232 Data Signals: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND	●	●		
RS-422 Signals: Tx+, Tx-, Rx+, Rx-, RTS+, RTS-, CTS+, CTS-, GND			●	●
RS-485 Signals (4-wire): Tx+, Tx-, Rx+, Rx-, GND			●	●
RS-485 Signals (2-wire): Data+, Data-, GND			●	●
Embedded 15KV ESD Surge Protection	●	●	●	●
Optical Isolation Protection: 2KV per Port			JetCard 1402i	JetCard 1404i
Operating Temperature: -10°C to 70°C	JetCard 1204	JetCard 1208	●	●
Operating Temperature: -40°C to 80°C	JetCard 1204w	JetCard 1208w		
OS Supported: Windows 98/Me/NT/2000/XP/2003,				
Linux RedHat Enterprise 4.0 (2.6.9)/RedHat				
Enterprise 3.0 (2.4.21)/RedHat 9.0 (2.4.20)/				
RedHat 8.0 (2.4.18)/RedHat 7.3 (2.4.18)/	●	●	●	●
RedHat 7.2 (2.4.7)/FC5(2.6.16)/FC3(2.6.9)/				
FC2(2.6.5)/FC1(2.4.22)/Mandrake 10.1(2.6.8)/				
Mandrake 9.2 (2.4.22)				
Board Connector	DB-37 Female	DB-62 Female	2 DB-9 Male	DB-37 Female
Supports DB-9 Male or DB-25 Male Cable Connection	●	●		●
Regulatory Approvals:CE/ FCC	●	●	●	●
RoHS / WEEE	●	●	●	●