

JetPort 5216 16 Port Rackmount Serial Server



- 16 ports RS232 over 10/100M Ethernet
- Real COM Driver for Windows 2000/XP/2003/Vista, Linux
- Versatile Serial Services: Real Com, TCP Server
- Multi-level secure user authentication and authorization by SSH / Telnet or Console
- Auto IP Discovery, and Virtual Port Mapping Utility
- User Access by Port
- Dial-in Modem and Direct Access by PPP/Hyper Terminal
- Choice of configuration methods: Web console, Console terminal
- SNMP MIB II, RS-232 MIB for network management, SNMP Trap
- Event Notification by Syslog, Email and SNMP trap
- Standard 19-inch rackmount 1U size

Overview

JetPort 5216 is the 16-port Rackmount Ethernet to Serial device server which is ideal for centralized management and multiple device management with system security protection. JetPort 5216 can be set up and managed via the easy-to-use utilities Real

COM, TCP/IP, HTTPS, SSH, and Telnet SNMP. JetPort 5216 adopts the Remote Authentication Dial-In User Service (RADIUS), users can control up to 8/16 serial devices on one IP address over Ethernet.

Easy-to-use Interface with Versatile Functions: Real COM Management

The JetPort8/16 Port Utility is a user-friendly interface and is compatible with SSH, Telnet, and Putty..etc the client programs .On JetPort 5216, users can remotely monitor, control, download, or upload data from RS-232 devices or other

servers via Real Com management. Users can also use the graphic interface from browser to log in systems to easily manage various commands such as cut, paste, copy, the screen snapshot or use virtual terminal to record the status.

Enhanced Security of Auto-encryption Mechanism

JetPort 5216 allows 16 device users to separately log in central system according to individual authorization. In addition, system administrators can securely connect to central system by


3 ways---the traditional dial-in modem, the serial application PPP/Hyper Terminal, and the IP application SSH/Telnet to effectively and efficiently manage the remote data center.

19-inch Rackmount Designed for Surveillance & Monitoring in Control Room

JetPort 5216 can be mounted to standard 19-inch Rackmount for users to manage and operate in control room, thus it is more convenient for instant maintenance in various industries and vertical

markets such as Surveillance requirements for city security, public transportation, telecommunication, and some hazardous locations such as oil&gas plant, mining, and power distribution station.

Dimensions (Unit-mm)

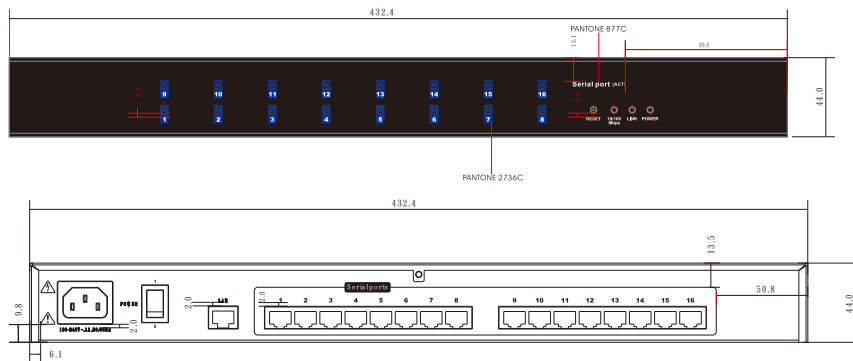

- Industrial PoE Switch
- IP67/68 Ethernet Switch
- Rackmount Managed Switch
- Gigabit Switch
- Redundant Switch
- Entry-Level Switch
- Networking Computer
- Communication Computer
- Ethernet I/O Server
- Serial Device Server**
- Media Converter
- Multiport Serial Card
- SFP Module
- Din Rail Power Supply

Specification

Technology

Standard: IEEE802.3 10Base-T

IEEE802.3u 100Base-TX

IEEE802.3x flow control

Serial Communication

Number of Ports: 16

Interface: RS-232

Connectors: RJ45

Data Rates: 115.2 bps

Data Bits: 5, 6, 7, 8

Parity: odd, even, none

Stop Bits: 1, 1.5, 2

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, GND, DCD

Flow Control: XON/XOFF, RTS/CTS, DTR/DSR

Serial Line Protection: 15KV ESD

Network Communication

Connector: RJ-45

Feature: Auto MDI/MDI-X, 10/100M Auto-Negotiation

Other

LED

PWR: Startup(Blue); Ready(Green)

Ethernet Link: Green

100M/10M Link: 100M Link(Green)/10M Link(Orange)

Serial: Green

Software

Configuration: Windows Utility, HTTPS, SSH, Telnet, SNMP, DHCP Client, Device Password, Firmware Upgrade, Save to Flash

Group Configuration Wizard:

Group IP Wizard, Group firmware upgrade, Group Backup/Restore, VCOM and TCP Tunnel Setup Wizard

MIB: RFC1213 MIB II, RFC1317 RS232_like

SNMP Trap: Send Trap for pre-defined Traps

SNTP: For time management

Serial Service Mode: Real COM, TCP Server

Advanced Setting: Port-Specific access right, Direct port addressing- via SSH to any Serial Over IP port, Direct Access via serial applications or IP application, VT320 support

Monitor: Devices' status, session history

E-Mail Alert: Automatic e-mail warning by pre-defined events

Power Requirements

System Power: 100-240 VAC

Power Consumption: 8Watts /120VAC, 230VAC

Mechanical

Installation: Rackmount

Dimension: 43.72 x 21.40 x 4.40 cm (1U/19")

Net Weight: 3.30kg/3.40kg

Environmental

Operating Temperature: 0 ~ 50°C

Operating Humidity: 5% ~ 95%, (non-condensing)

Storage Temperature: -20 ~ 60°C

Storage Humidity: 5%~ 90%, (non-condensing)

Regulatory Approvals

EMI: FCC Class A, CE/EN55022.

EMC Immunity Interface:

EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11

Safety: CE/EN60950

Shock: IEC60068-2-27

Vibration: IEC60068-2-6

Free Fall: IEC60068-2-32

Ordering Information

JetPort 5216 16 port Rackmount Serial Device Server

Includes:

- JetPort 5216
- Quick Installation Guide
- 100-240VAC power adapter
- Din-Rail kit and foot pads
- Documentation and Software CD-ROM

Optional Accessory

- CM9RJ45, Serial cable (RJ45 to DB9 male, 150cm)