


## 1.25G SFP-1000T Transceiver Hot Pluggable, RJ-45, Active Copper SFP

# SFPGRJ45/ SFPGRJ45-w



- Compliant with SFP MSA
- Compliant with IEEE802.3-2002 and 802.3ab
- Compatible with 1000BASE-X and 1000Base-T
- Hot Pluggable
- RoHS Compliant
- Auto-detect MDI/MDI-X
- Interface: RJ-45 Connector
- Speed: 1000Base-T
- Distance: 100m with Cat.5 UTP Cable
- Operating Temperature: 0-70 °C  
(SFPGRJ45-w : -40-85 °C)
- Storage Temperature: -40-85 °C
- Humidity: 5-95%

## Dimension

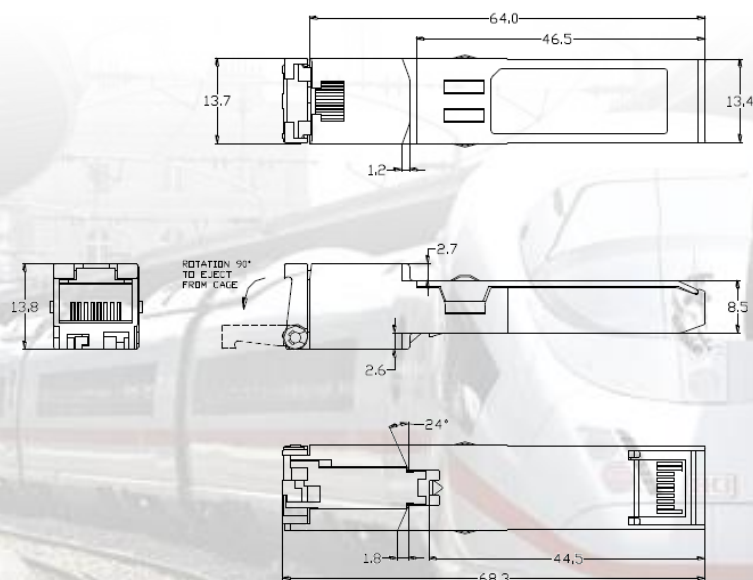

(All Dimensions are  $\pm 0.20$ mm Unless Otherwise Specified, Unit: mm)