

## JetNet 3710G

### Industrial 8 PoE + 2 GbE Switch



- Eight 10/100 TX PoE plus two 10/100/1000TX uplink ports
- DC 48V input, deliver 8 port PoE @48V
- 802.3af compliant PoE: Total power budget is 65W\* with max. 15.4W per port
- Two gigabit Ethernet ports for larger uplink bandwidth of surveillance
- Support QoS for optimizing video and VoIP stream
- -25~70°C operating temperature

CE FC  RoHS

2 Giga Uplink

65W\*

QoS

-25~70°C

## Overview

JetNet 3710G is an Industrial PoE Switch designed with 8 Fast Ethernet PoE ports and 2 Gigabit uplink ports to ensure high-bandwidth uplink connection for large-scale surveillance system networks. The PoE injection ports can deliver up to 65W\* per unit (@70°C) to power PoE-enabled devices. Moreover, the compact size with aluminum alloy metal enclosure allows JetNet 3710G to reliably operate under -25~70°C wide temperature range applications.

### Gigabit bandwidth and QoS supported

JetNet 3710G features eight PoE ports and two uplink


gigabit Ethernet ports. Customers can connect up to 8 IP cameras and provide guaranteed large image uplink bandwidth connection. In addition, the JetNet 3710G supports QoS to ensure the high quality of video traffic transmission by simply adjusting the priority of data transfer.

### Fault Relay function provided

JetNet 3710G provides fault relay to automatically warn users if any abnormal situation occurs. As a result, users can quickly handle the emergency and shorten the failover time.

\*Specifications may change without prior notice

## Dimensions (Unit = mm)

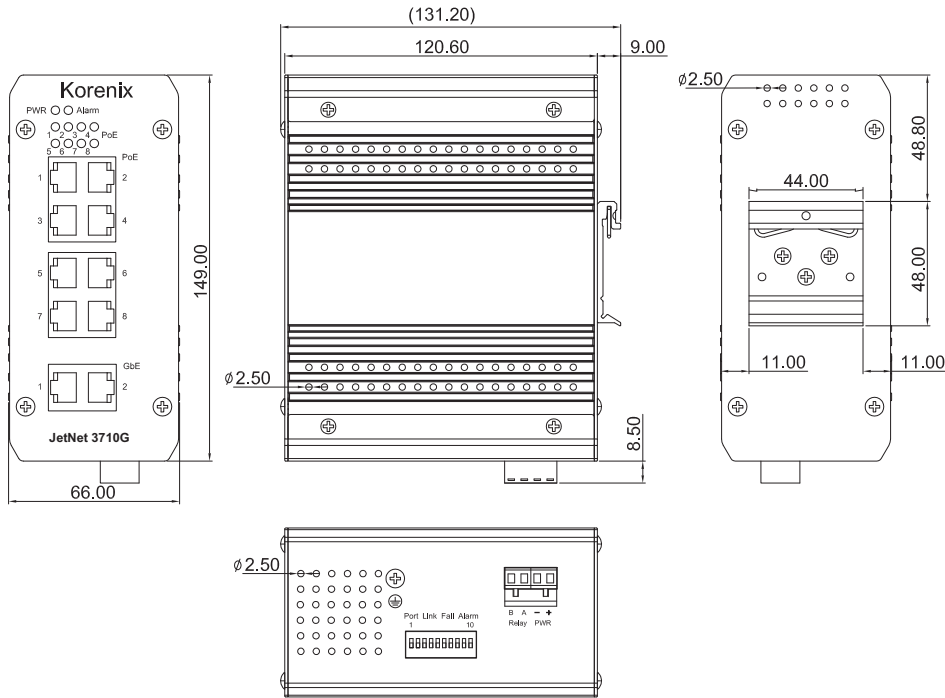

- Industrial Intelligent NMS
- Rackmount PoE Plus Switch
- Industrial PoE Plus Switch
- Industrial 12-24V PoE Switch
- Industrial PoE Switch**
- Rackmount L3/L2 Switch
- Gigabit Managed Switch
- Managed Ethernet Switch
- Entry-level Switch
- Wireless Outdoor AP
- Embedded PoE/Router Computer (LINUX)
- Industrial Communication Computer (WIN/LINUX)
- Ethernet/PoE/Serial Board
- Ethernet I/O Server
- Media Converter
- Serial Device Server
- SFP Module
- Din Rail Power Supply

## Specifications

### Technology

- Standard:**
- IEEE 802.3 10Base-T Ethernet
  - IEEE 802.3u 100Base-TX Fast Ethernet
  - IEEE 802.3ab 1000Base-T
  - IEEE802.3x Flow Control and Back-pressure
  - IEEE 802.3af Power Over Ethernet
  - IEEE 802.1p Class of Service

### Performance

- Switch Technology:** Store and Forward Technology with 32Gbps Switch Fabric
- System Throughput:** 14,880pps for 10M Ethernet, 148,800pps for 100M Fast Ethernet, 1,488,100pps for Gigabit Ethernet
- Transfer packet size:** 64 bytes to 1522 bytes (with untagged and tagged frames)
- MAC Address:** 8k
- Packet Buffer:** 1 Mbits

### Interface

- Configuration:** 802.3af compliant PoE ports x 8  
10/100/1000Base-TX x 2  
Auto MDI/MDI-X, Auto Negotiation

### Cables:

- 10 Base-T: 2-pair UTP/STP Cat. 3,4,5 cable (100m)
- 100 Base-Tx: 2-pair UTP/STP Cat. 5 cable (100m)
- 1000 Base-T: 4-pair UTP/STP Cat. 5 cable (100m)
- 10Base-T: 4-pair UTP/STP Cat 3,4,5, 100ohm (100m) for PoE
- 100Base-Tx: 4-pair UTP/STP Cat.5, 100ohm (100m) for PoE

### LED per unit:

- PoE (Green) x8
- Fault alarm (Red) x1
- Power on/ off (Green on/ off) x1

### LED on Ethernet port:

- Link/ Activity (Green on/ blinking)
- Gigabit copper: Link/Act (Green on/ Blinking)
- Full duplex/ Collision (Yellow on/ Blinking)
- Gigabit copper: Speed (Yellow Blinking)

### Relay Alarm:

Dry Relay output with 1A@24V ability

### PoE Technology:

Alternative B

### PoE Output Voltage:

48V / 65W

### Power Requirements

Power Input: 48V

Power Consumption: 7W@DC 48V without PD loading



### Mechanical

**Construction:**

Rugged Aluminum Alloy Chassis

**Mounting:** DIN-Rail

**Dimension:**

66(W) x 149(H) x 131.2(D) mm (with Din-rail clip)

**Net weight:** 1.05kg

### Environment

**Operating Temp:** -13 ~ 158°F(-25 ~ 70°C), 5 to 95% RH

**Storage Temp:** -40 ~ 176°C(-40 ~ 80°C), 5 to 95% RH

**EMI:** FCC class A, CE/EN55022 Class A

**EMC:** EN61000-4-2, EN61000-4-3, EN61000-4-4,

EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11

**Safety:** UL 60950-1, CSA C22.2 No. 60950-1

**Shock:** IEC60068-2-27 (50g peak acceleration) **Vibration:**

IEC60068-2-6 (5g/5~500Hz/random operation) **MTBF:**

greater than 200,000 hours @ 25°C

**Warranty:** 5 years

## Ordering Information

\* Pending

### JetNet 3710G Industrial 8 PoE+2GbE Switch

Includes:

- JetNet 3710G
- Attached 4-pin power terminal block
- Quick installation guide